

# KingSlide Sidemount Series

## 3301 - Full Extension Standard Ball Bearing Slide



### Specifications

**Length:** 10"-39" (250mm-900mm)

**Height:** 45 mm (1.77")

**Side Space:** 12.7 mm  
(+0.5mm-0mm)

**Travel:** Full Extension

**Mount:** Sidemount

**Load:** 45 kg (100 lb.) Pair (Max)

**Disconnect:** Lever Disconnect

**Finish:** Zinc Plated or Black

**Material:** Cold Rolled Steel

**Packaging:** 15 Pair/Carton

**Bulk Pack:** 40 pcs/carton for  
external, 100 pcs/carton for  
internal

### Features

- Dual design allows for traditional pull-open preventing damages caused by improper installation and usage
- Ultra smooth with high rigidity and stability design
- 50,000 life cycles guaranteed under proper installation and normal usage

### Applications


- Home Cabinets
- Work Stations
- Office Furniture
- Box Drawers

# Full Extension Slide

## Sidemount Slides Series

### Dimensional Specifications

#### Space Requirements

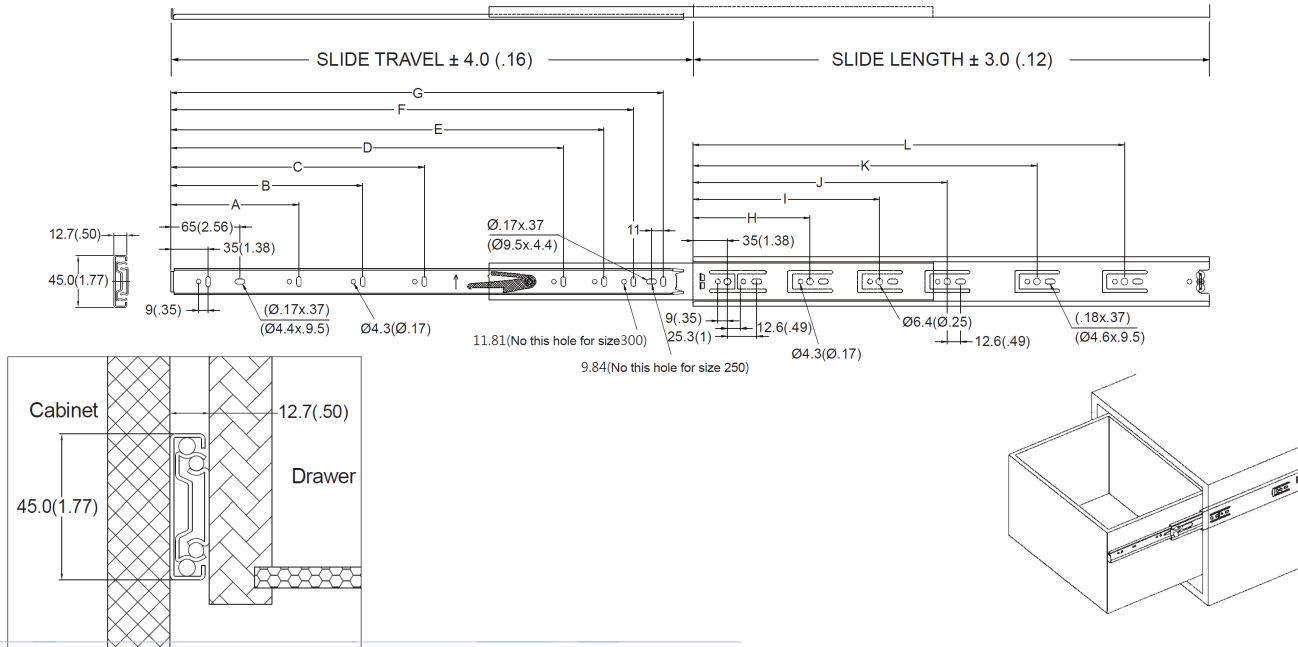

#### Ordering

Item	Description
280-383	10" - 3301 100lb ball bearing slide
280-809	12" - 3301 100lb ball bearing slide
280-416	14" - 3301 100lb ball bearing slide
280-384	16" - 3301 100lb ball bearing slide
280-384	18" - 3301 100lb ball bearing slide

Item	Description
280-385	20" - 3301 100lb ball bearing slide
280-386	22" - 3301 100lb ball bearing slide
280-810	24" - 3301 100lb ball bearing slide
280-1003	mounting bracket

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Holes Position mm (inch)												
				A	B	C	D	E	F	G	H	I	J	K	L	
3301-200	195.0 (7.67)	225 (8.85)	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3301-250	250.0 (9.84)	250.0 (9.84)	23.0 (50.0)	131 (5.16)	—	—	—	—	—	227 (8.94)	—	—	—	—	—	195 (7.68)
3301-300	300.0 (11.81)	305.0 (12.00)	27.0 (60.0)	163 (6.42)	—	—	—	—	—	255 (10.04)	277 (10.91)	163 (6.42)	—	—	—	259 (10.20)
3301-350	350.0 (13.78)	351.0 (13.82)	34.0 (75.0)	163 (6.42)	—	—	—	—	—	305 (12.01)	327 (12.87)	163 (6.42)	—	—	—	259 (10.20)
3301-400	400.0 (15.75)	403.0 (15.87)	45.0 (100.0)	163 (6.42)	—	—	—	—	—	355 (1.98)	377 (14.84)	163 (6.42)	259 (10.20)	—	—	355 (13.98)
3301-450	450.0 (17.72)	452.0 (17.80)	45.0 (100.0)	163 (6.42)	—	355 (13.98)	—	—	—	405 (15.95)	427 (16.81)	163 (6.42)	259 (10.20)	—	—	387 (15.24)
3301-500	500.0 (19.69)	509.0 (20.04)	45.0 (100.0)	163 (6.42)	259 (10.20)	355 (13.98)	—	—	—	451 (17.75)	477 (18.78)	163 (6.42)	259 (10.20)	—	—	451 (17.76)
3301-550	550.0 (21.65)	563.0 (22.17)	45.0 (100.0)	163 (6.42)	259 (10.20)	451 (17.75)	—	—	—	505 (19.88)	527 (20.75)	163 (6.42)	259 (10.20)	387 (15.24)	—	483 (19.02)
3301-600	600.0 (23.62)	605.0 (23.83)	39.0 (85.0)	163 (6.42)	259 (10.20)	451 (17.75)	—	—	—	555 (21.85)	577 (22.72)	163 (6.42)	259 (10.20)	387 (15.24)	—	515 (20.28)
3301-650	650.0 (25.59)	656.0 (25.83)	32.0 (70.0)	163 (6.42)	259 (10.20)	451 (17.75)	579 (22.80)	—	—	605 (23.82)	627 (24.69)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-700	700.0 (27.56)	707.0 (27.83)	27.0 (60.0)	163 (6.42)	259 (10.20)	451 (17.75)	579 (22.80)	—	—	655 (25.79)	677 (26.65)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-750	750.0 (29.53)	757.0 (29.80)	22.0 (48.0)	163 (6.42)	259 (10.20)	355 (13.98)	579 (22.80)	—	—	705 (27.76)	727 (28.62)	163 (6.42)	259 (10.20)	387 (15.24)	—	579 (22.80)
3301-800	800.0 (31.50)	805.0 (31.69)	18.0 (39.0)	163 (6.42)	259 (10.20)	355 (13.98)	579 (22.80)	—	—	755 (29.73)	777 (30.59)	163 (6.42)	259 (10.20)	387 (15.24)	579 (22.80)	707 (27.83)
3301-900	900.0 (35.43)	999.0 (39.33)	18.0 (39.0)	163 (6.42)	259 (10.20)	387 (15.24)	611 (24.06)	739 (29.09)	855 (33.66)	877 (34.53)	163 (6.42)	259 (10.20)	387 (15.24)	579 (22.80)	771 (30.35)	—