

# CGS Undermount Slide Series

**FULL-EXTENSION, PUSH-TO-OPEN  
UNDERMOUNT FRAMELESS SLIDES**



## Specifications

**Length:** 9" - 21" (229mm - 533mm)  
**Travel:** Full Extension  
**Mount:** Undermount  
**Dynamic Load:** 35kg / 75lb Pair  
**Static Load:** 45kg / 100 lb  
**(Max) Disconnect:** Lever Disconnect  
**Finish:** Zinc Plated  
**Material:** Cold Rolled Steel



## Features

- Quick and Easy up/down, left/right and front/back adjustments
- Adjustment Range: 0-3mm Height, 0-2.5mm Depth, + 1.5mm Lateral
- Silent system guarantees smooth no noise Cushion Close operation
- Industry Standard drilling pattern based upon 32mm system
- Tool Free assembly and removal
- Limited Lifetime Warranty

## Applications

- Kitchen & Bath Cabinets
- Store Fixtures
- Architectural Millwork
- Office Furniture
- Medical Equipment Storage Carts & Storage Racks
- Carts & Storage Racks
- Manufactured Housing

# Full Extension Slide

## Cushion Close Undermount Slide



### Frameless Full-Extension Cushion Close Undermount

Item	Description
250mm	280-212
300mm	280-213
350mm	280-214
400mm	280-215
450mm	280-216
500mm	280-217
550mm	280-218


### Frameless Full-Extension Push-to-Open Undermount

Item	Description
250mm	280-232
300mm	280-233
350mm	280-234
400mm	280-235
450mm	280-236
500mm	280-237
550mm*	280-23


\*special order

## Dimensional Specifications

The drawer slide with locking brackets installation size

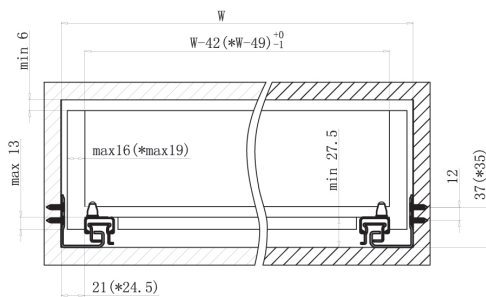

Rear connecting link installation size

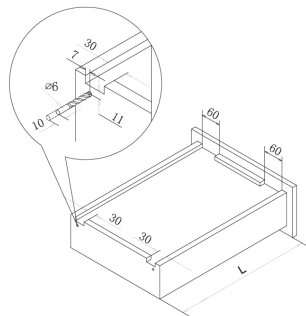

### Undermount Slide Front Brackets



#### Front Fixing Bracket Screw-In Set

2-way adjustable front bracket	280-1068
6-way adjustable front bracket	280-1067

W: internal cabinet width


L: drawer length

NL: assembling dimensions length

DL: internal cabinet depth


X: the drawer board thickness

#### Standard drawer

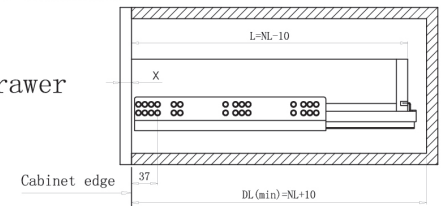

assembling dimensions length	250	300	350	400	450	500	550	600
Drawer length	240	290	340	390	440	490	540	590

#### Inner drawer

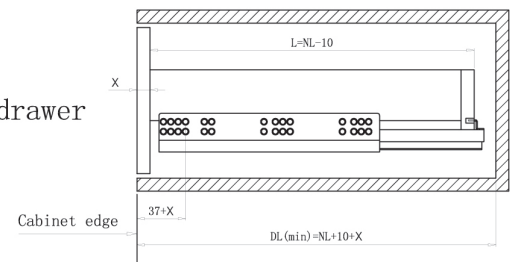

assembling dimensions length	250	300	350	400	450	500	550	600
Drawer length	240	290	340	390	440	490	540	590

