

KING SLIDE®

3M52

Premium Quality, Full Extension Ball Bearing Slide with Silent Soft-Closing



Silent Soft-Closing Side Mount Ball Bearing Slide



**The King 3M52 Slide
allows you to effortlessly and
elegantly operate drawers.**


- Durable damping system with fast response capability
- Enhanced silent soft-closing feature with light opening force
- Ultra smooth gliding motion with high rigidity and stability design
- 50,000 life cycles guaranteed under proper installation and normal usage

Applications

- Medical Equipment
- Work Stations
- Office Furniture
- Industrial
- Kitchen Furniture
- Home Cabinets
- Box Drawers

Visit YouTube for a demonstration.
<http://youtu.be/rfTiMIOL3Cg>

**To order please contact your
local distributor.**



COMTRADSOURCING.com
1-866-200-0564



Full Extension Side Mount Ball Bearing Slide with Silent Soft-Closing

Specifications

Length: 12" to 24"
(300 to 600 mm)

Height: 45.6mm (1.80")

Side Space: 12.7mm (+0.5mm-0mm)

Travel: Full Extension

Mount: Side Mount

Load: 34 kg (75 lb)/pair (max)




Disconnect: Lever Disconnect

Finish: Clear Zinc


Material: Cold Rolled Steel

Features: Silent Soft-Closing

Unit Packed: 10 pairs/carton

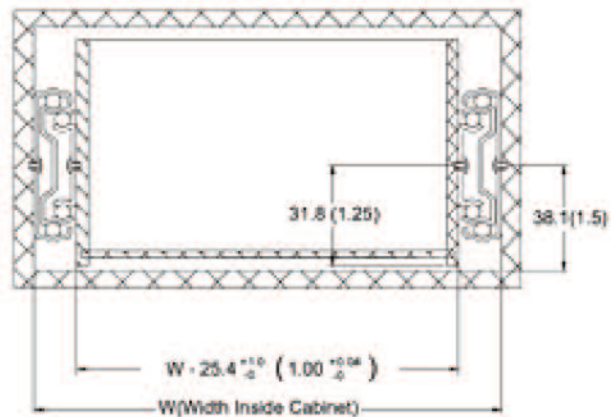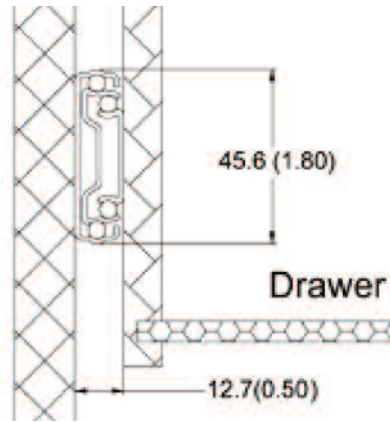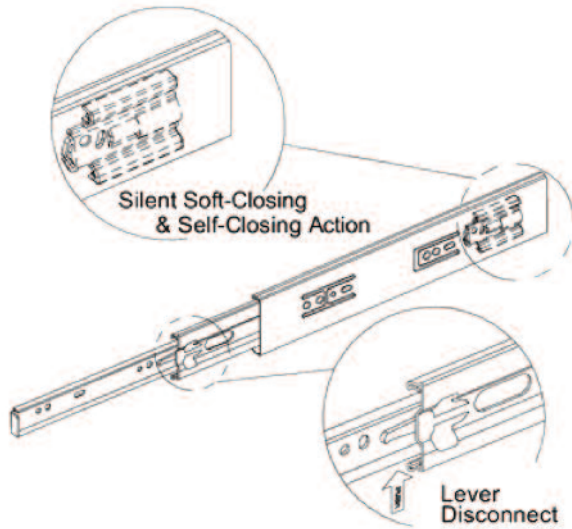

Installation Specification

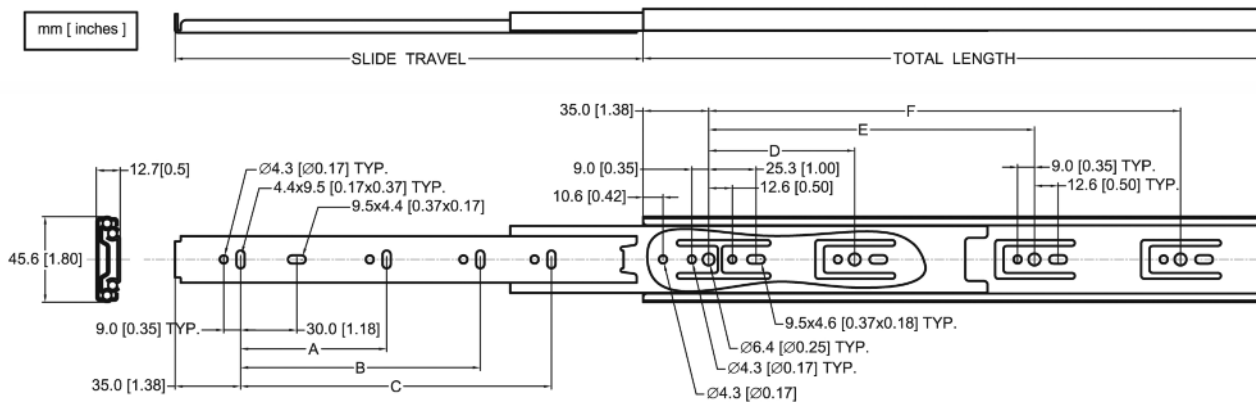

| Part No. | Total Length | Slide Travel | Loading Capacity | Holes Position | | | | | |
|----------|--------------|--------------|------------------|----------------|-------------|-------------|------------|-------------|-------------|
| | | | | A | B | C | D | E | F |
| 280-970 | 302 (11.89) | 285 (11.22) | 18 (40) | 96 (3.78) | — | — | 96 (3.78) | — | — |
| 280-971 | 352 (13.86) | 345 (13.58) | 25 (55) | 128 (5.04) | 224 (8.82) | — | 128 (5.04) | — | — |
| 280-972 | 402 (15.83) | 400 (15.75) | 29 (65) | 128 (5.04) | 256 (10.08) | — | 128 (5.04) | 192 (7.56) | — |
| 280-973 | 452 (17.80) | 450 (17.72) | 34 (75) | 128 (5.04) | 320 (12.60) | — | 128 (5.04) | 256 (10.08) | — |
| 280-974 | 502 (19.76) | 500 (19.69) | 34 (75) | 128 (5.04) | 224 (8.82) | 352 (13.86) | 128 (5.04) | 256 (10.08) | — |
| 280-975 | 552 (21.73) | 550 (21.65) | 32 (70) | 128 (5.04) | 256 (10.08) | 384 (15.12) | 128 (5.04) | 224 (8.82) | 320 (12.60) |
| 280-976 | 602 (23.70) | 600 (23.62) | 32 (70) | 128 (5.04) | 288 (11.34) | 416 (16.38) | 128 (5.04) | 224 (8.82) | 352 (13.86) |